

# Geophysical Evaluation of Gold Potential in Southeastern Part of Kafin-Koro, Northwestern Nigeria

ALABI A. A. \*, ABDULLAHI S.

Department of Geology, Federal University of Technology Minna, Nigeria

\*Corresponding author: [alabiadekola@futminna.edu.ng](mailto:alabiadekola@futminna.edu.ng)

Received October 11, 2018; Revised November 14, 2018; Accepted December 04, 2018

**Abstract** Gold mineralization in Nigeria is traversed by regional northwest - southeast lineaments or shear zone which have been considered as continental extension of oceanic transform fault - fracture zone, and it is suggested that the migmatization and metamorphic deformation of the metasedimentary and metavolcanic rocks gave rise to dispersion of gold in quartz veins within the Nigeria basement complex. Combined geophysical methods have been used in the exploration for ore mineral bodies. Induced polarization (IP) technique has proved favourable for mineral exploration in hard rock terrain, as well as for ground water exploration and environmental geology studies. Also, magnetic technique has been used in identifying massive sulfide hosted quartz veins. The study area lies within the Kushaka schist Formation of the north-western block of Nigeria basement complex and Nigeria metallogeny province, the formation has been intruded by large volumes of granitic rocks that led to extensive migmatization of metasedimentary and metavolcanic rocks carrying substantial gold mineralization. Combined magnetic and IP and resistivity imaging technique was used in the study. The magnetic profiles in the study area showed anomalies of varying amplitudes. The variation in amplitudes of the residual intensity may be due to the presence of geological structures such as faults, dykes and contacts in the area. The total magnetic intensity map of the area exhibits zonation and alteration that indicates hydrothermal alteration which is usually associated with mineralization probably as a result of intrusion. Observed apparent resistivity and IP data presented as pseudo-section and 2-D inverted resistivity-IP mode show a qualitative idea of resistivity and chargeability distribution in the subsurface. The ground magnetic survey generally suggests a step or an edge structures like dyke or intrusion, such structures are of interest may hold mineralization at certain depth.

**Cite This Article:** ALABI A. A., and ABDULLAHI S., "Geophysical Evaluation of Gold Potential in Southeastern Part of Kafin-Koro, Northwestern Nigeria." *Journal of Geosciences and Geomatics*, vol. 6, no. 3 (2018): 153-164. doi: 10.12691/jgg-6-3-6.

## 1. Introduction

Gold mineralization in Nigeria is largely defined by different orogenic events and tectonic structures that accompanied it. Generally, gold mineralization in Nigeria is traversed by regional northwest - southeast lineaments or shear zone which have been considered as continental extension of oceanic transform fault - fracture zone, and it is suggested that the migmatization and metamorphic deformation of the metasedimentary and metavolcanic rocks gave rise to dispersion of gold in quartz veins within the Nigeria basement complex [1]. Geophysical technique in mineral exploration depends on the lithological, mineralogical and alteration characteristics of any deposit type. Aeromagnetic technique can provide valuable mapping information that can delineate lithologies, regional faults and shear zones which could be zone of gold potential. Combined geophysical methods have been

used in the exploration for ore mineral bodies [2,3]. Induced polarization (IP) technique has proved favourable for mineral exploration in hard rock terrain, as well as for ground water exploration and environmental geology studies [4-10]. Also, magnetic technique has been used in identifying massive sulfide hosted quartz veins

Electromagnetic (EM) method has been successfully used to map faults, veins, contacts and alteration in the basement complex of Nigeria. Induced polarization (IP) method and gamma ray spectrometry have local applications to map massive quartz veins (resistivity highs) and associated alteration (potassium highs) zones. For epithermal styles of mineralization, several geophysical techniques has been used to delineate favourable structures and alteration mineral occurrence zone, these include regional gravity lows over thick volcanic sequences and local gravity highs associated with felsic intrusions, magnetic lows associated with alteration, regional potassium highs associated with felsic volcanism and local potassium highs with corresponding low Th/K associated with potassic alteration.

## 2. Geology of the Study Area

The study area lies within the Kushaka schist Formation of the north-western block of Nigeria basement complex and Nigeria metallogeny province, the formation has been intruded by large volumes of granitic rocks that led to extensive migmatization of metasedimentary and metavolcanic rocks carrying substantial gold mineralization [11]. The geology of the area of investigation (Kafin-koro) is a typical geology of Kuseriki – Minna region, comprising of crystalline rocks that have been divided into three groups similar to that Nigeria basement complex, namely (Figure 1);

- 1) A basement unit comprising gneisses and migmatite with relicts of supracrustal rocks.
- 2) North-south trending schist belts composed of medium-to low grade supracrustal cover.
- 3) Intrusive granitic rocks (Older Granite Suite) which intrude both the gneiss, migmatite and the low grade schist belt.

Three schist belts have been mapped in Kuseriki – Minna region by Ajibade [12]. These belts include Kushaka, Birnin Gwari and Ushama schist belts, and are of typical of the geology of northwest schist belt of Nigeria.

## 3. Methods and Materials

Magnetic survey measurements were taken with GSM-19v7.0 Over Hauser Instrument (Plate 1 and Plate 2) manufactured by GEM SYSTEMS, Canada. The

GSM-19v7.0 Over Hauser instrument is the total field magnetometer with inbuilt GPS - representing a unique blend of physics, data quality, operational efficiency, system design and options that clearly differentiate it from other quantum magnetometers. With data quality exceeding standard proton precession and comparable to optically pumped cesium units, GEM's sensors represent a proprietary innovation that combines advances in electronics design and quantum magnetometer chemistry. Electronically, the detection assembly includes dual pick-up coils connected in series opposition to suppress far-source electrical interference, such as atmospheric noise.

Base station method for correction of diurnal variations was used while the area selected for base station was magnetically quiet, i.e. free from moving automobiles and is not close or on top of any major outcrop. Fourteen (14) profiles of 2.4km long each trending east-west were covered in the area with GSM-19 v7.0 Over Hauser instrument. The stored data from the instrument is dumped on a computer system. The dumped data is later saved in an Excel Spread-sheet for easy management. All Magnetics Stations were tied to their respective coordinates. Quality Control (QC) and Quality Assurance (QA) were then applied on the raw data through visual inspection. This is useful in making sure that all survey specifications have been adhered to. Observed geology, cultural features and all possible source of noise aided the execution of Quality Control and Quality Assurance on the data.

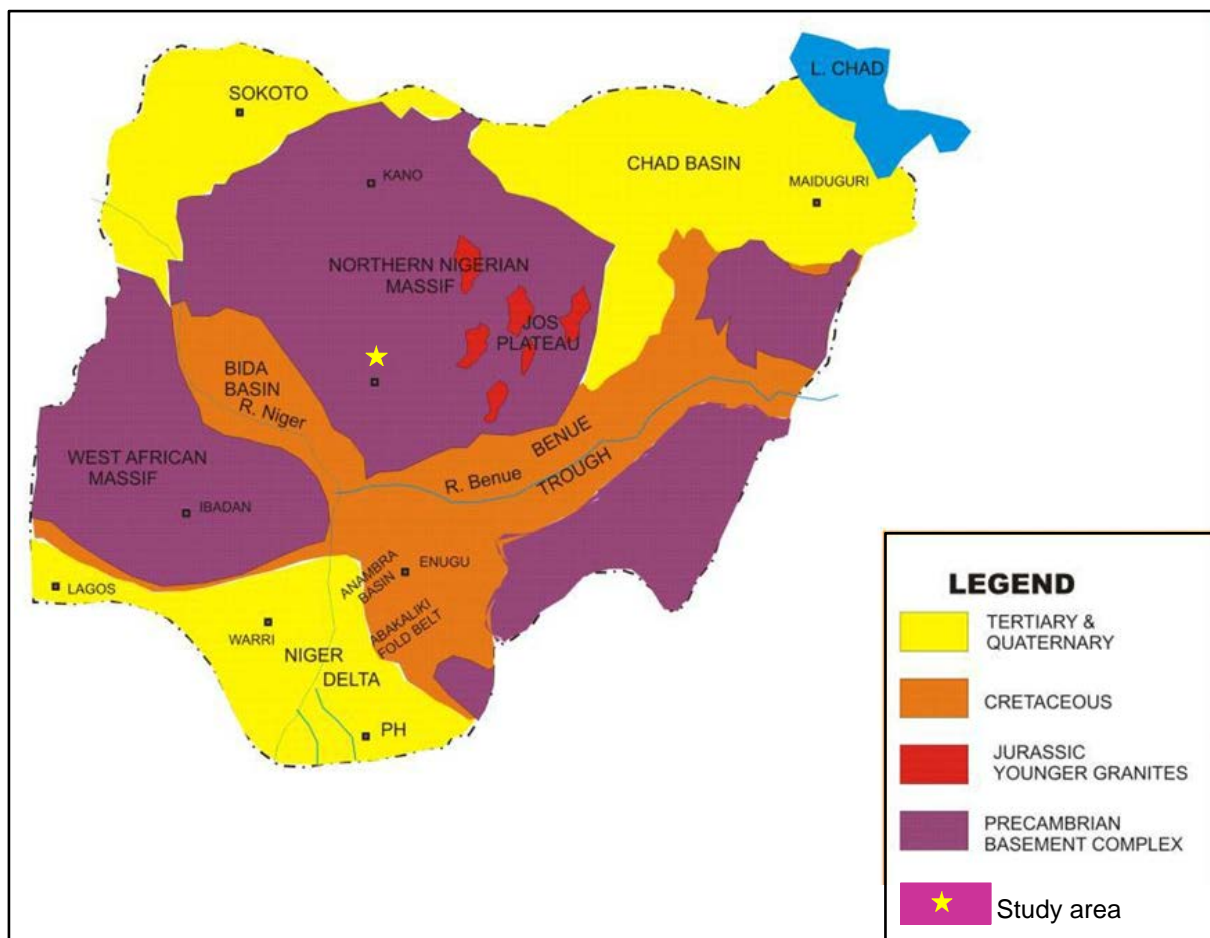


Figure 1. Geology map of Nigeria indicating the study area

Based on the result from the magnetic survey result, anomalous areas delineated were further explored using Induced polarization and resistivity imaging. Such areas were based on unique Magnetic response which area diagnostic of potential mineralization. Induced polarization (IP) technique involves measuring a transient decay after turning the transmitter off. There are many electrode arrays that are used in electrical imaging (e.g., Wenner, Schlumberger, dipole-dipole etc.) depending on the application and the resolution desired. The dipole-dipole array was used for this survey. Induced polarization (IP) and resistivity imaging survey was carried out simultaneously with Geomative GD-10 Supreme 2D Geoelectrical system manufactured by ST Geomative Co., Ltd, China. GD-10 series. Powerful

self-checking function for the high-quality data during measurement which including Grounding R test, switcher test and cable leader test. Ten (10) lines of about 360m to 600m each were covered with the Geomative GD-10 Supreme 2D Geo-electrical system in the study area (Figure 2).

The value for each IP and resistivity combination is plotted on a pseudo-section which resembles a cross section of the region under the profile. Pseudo-section plots apparent resistivity and chargeability at the point where lines drawn downward at the centre of each dipole intersect. This traditional pseudo-section exaggerates the depth of the anomalous materials; therefore 2D inversion of the apparent resistivity and chargeability data was carried out using finite element [13].



Plate 1. Magnetic and Induced polarization and resistivity data acquisition

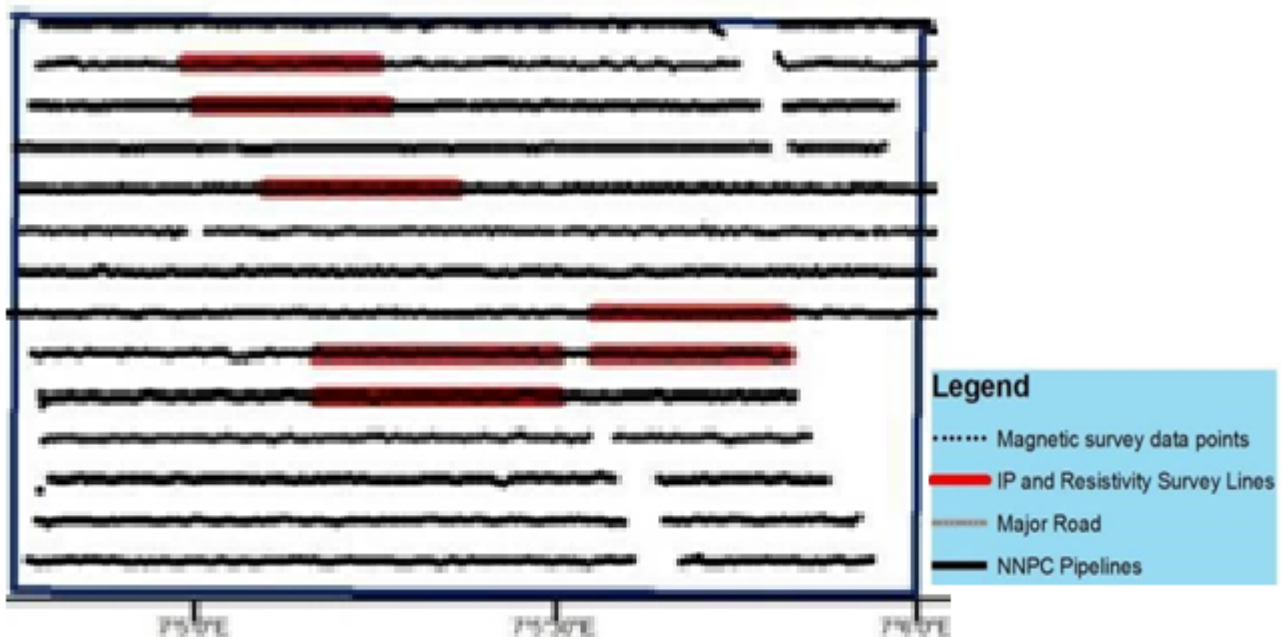


Figure 2. Geophysical Data Acquisition Map



## 4. Data Processing and Interpretation

### 4.1. Magnetic Data Processing

First stage in magnetic data processing involve the removal of diurnal variations of the earth's magnetic field, which may be resolved into secular changes, solar-diurnal changes, lunar changes and changes resulting from magnetic storms [14]. This represent very small but more rapid oscillations in earth's field which have a periodicity of about a day and amplitude averaging about 25 gammas and can cause a variation of the order of 50 gammas/hour. There are different ways of removing diurnal variations. In this study, base station method was used to correct for diurnal variation. Tuning field of 33,000nT was used for magnetometer throughout the survey. After recording, the magnetic data for a particular day were reduced to an arbitrary datum (i.e., base field for the day). The reduced magnetic data for all profiles was then put into a database for further two dimensional processing and interpretation.

Micro leveling or decorrugation method was used to remove line-to-line leveling errors of magnetic data which are visible as linear anomalies parallel to the lines. This was achieved using Butterworth and cosine directional filters. To estimate the geometry of geologic structures and depths to causative bodies, mathematical functions were applied to the total intensity magnetic field data. These were regional-residual calculations, derivatives calculations and source parameter imaging (SPI). Figures 3 show the colour-shaded map of the total magnetic intensity map of the study area.

Observed magnetic field at every point is a vector sum of various components, such as the regional field and the local field components. In addition to induced magnetism,

rocks may also have remnant magnetic component [15]. Remnant magnetism is the effect of the primary magnetic field at the time of rock formation. The total magnetic response is proportional to both the induced magnetism as well as remnant magnetism [16]. The regional field was assumed to be a first order polynomial plane and it was derived by least-square fitting of a plane:

$$T(x, y) = (a_0 + a_1x + a_2y) \quad (1)$$

Where  $x$  and  $y$  are unit spacing along the two axes of the area and  $a_0$ ,  $a_1$  and  $a_2$  are the coefficients of the plane. From this relation the regional gradients along any line were calculated. This was achieved with the aid of Geosoft MAGMAP software which is based on least square (best-fit polynomial). The computed regional anomaly map (Figure 4) were subtracted from the corresponding total magnetic field intensity map (Figure 3) to obtain the field due to local geological events i.e. residual magnetic maps (Figure 5). The computed residual field components of the magnetic data were calculated along profiles and were plotted against station locations for profile analysis. These plots of residual fields were stacked to allow for qualitative interpretation (Figure 6).

Several derivatives of the residual total magnetic field provide value-added products that may contribute to the geological interpretation of magnetic data. Since analytic signal is useful in locating the edges of magnetic source bodies, particularly where remanence and/or low magnetic latitude complicates interpretation; the analytical signal map of the residual magnetic field were produced (Figures 7). In order to observe the near-surface magnetic anomaly and likely vein structures in the study area, first vertical derivative and horizontal gradient maps (Figures 8) were produced.

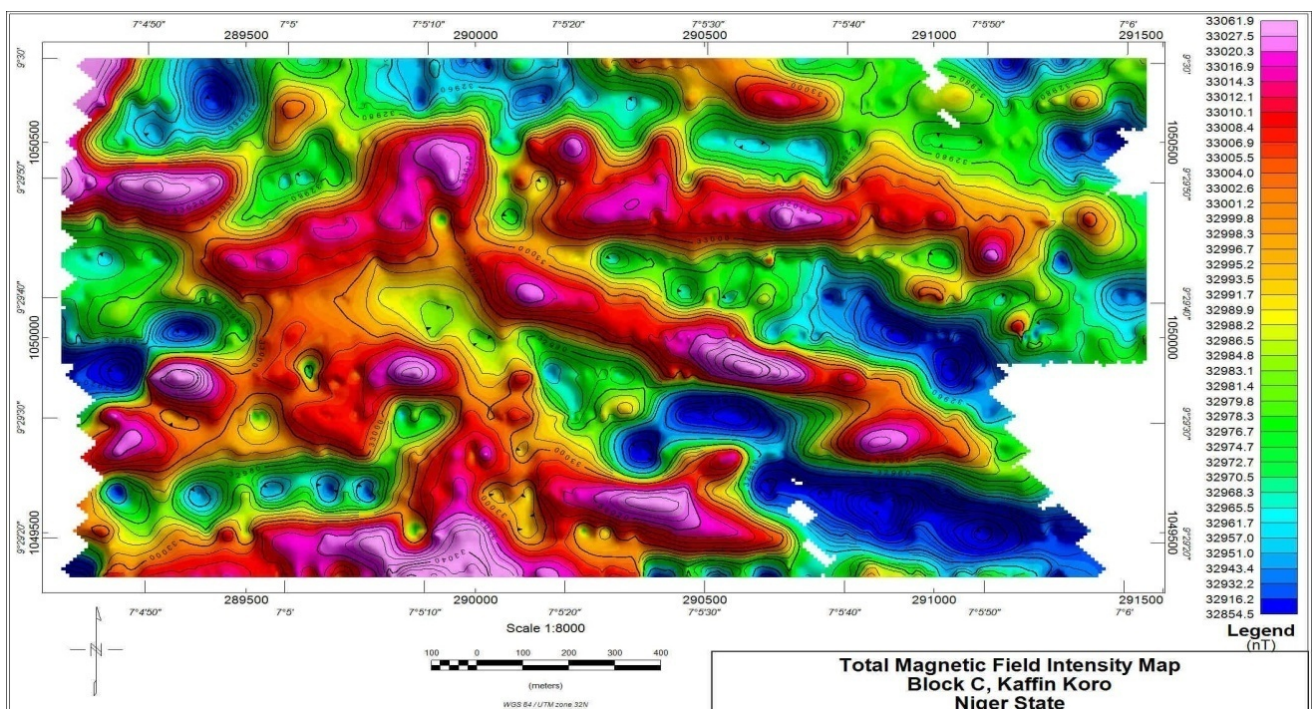


Figure 3. Total Magnetic Field Intensity map of the study area

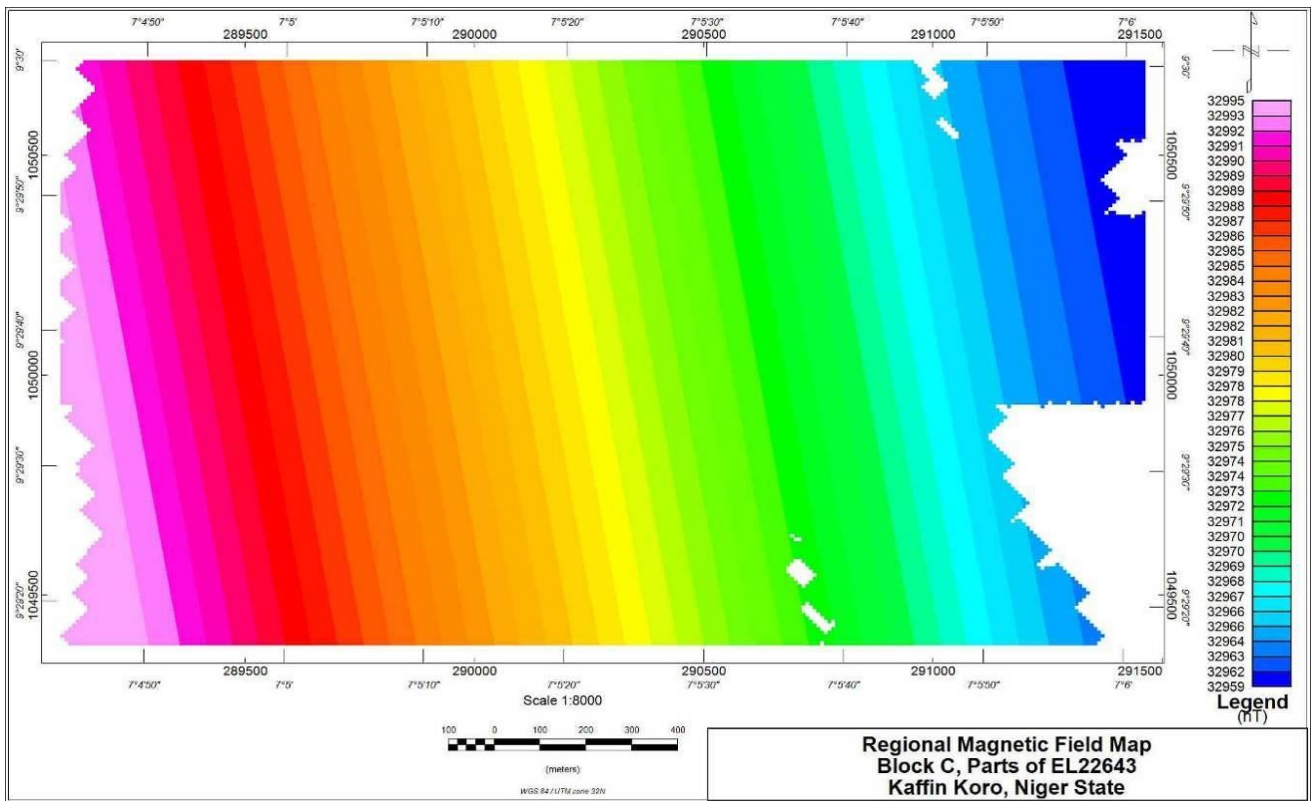


Figure 4. Regional Magnetic Field Intensity map of the study area

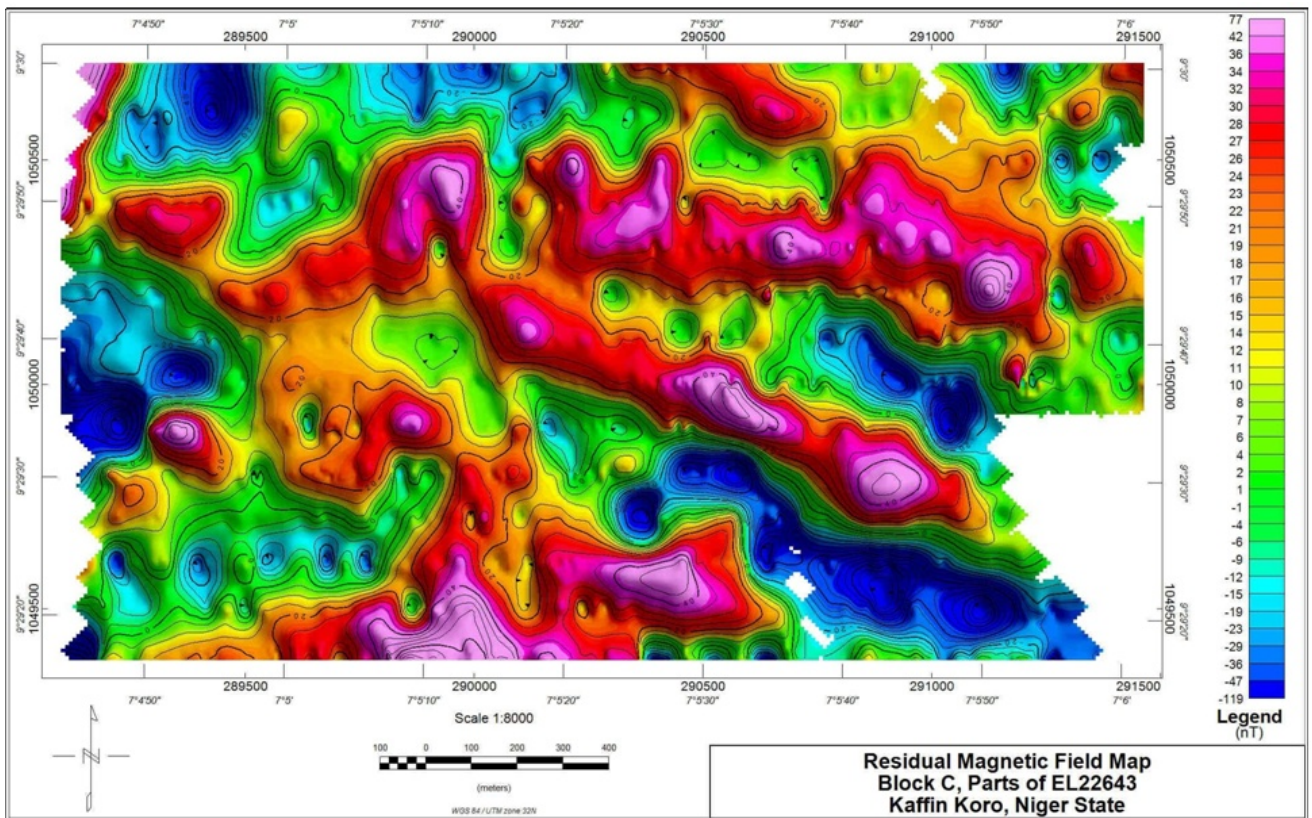


Figure 5. Residual Magnetic Intensity map



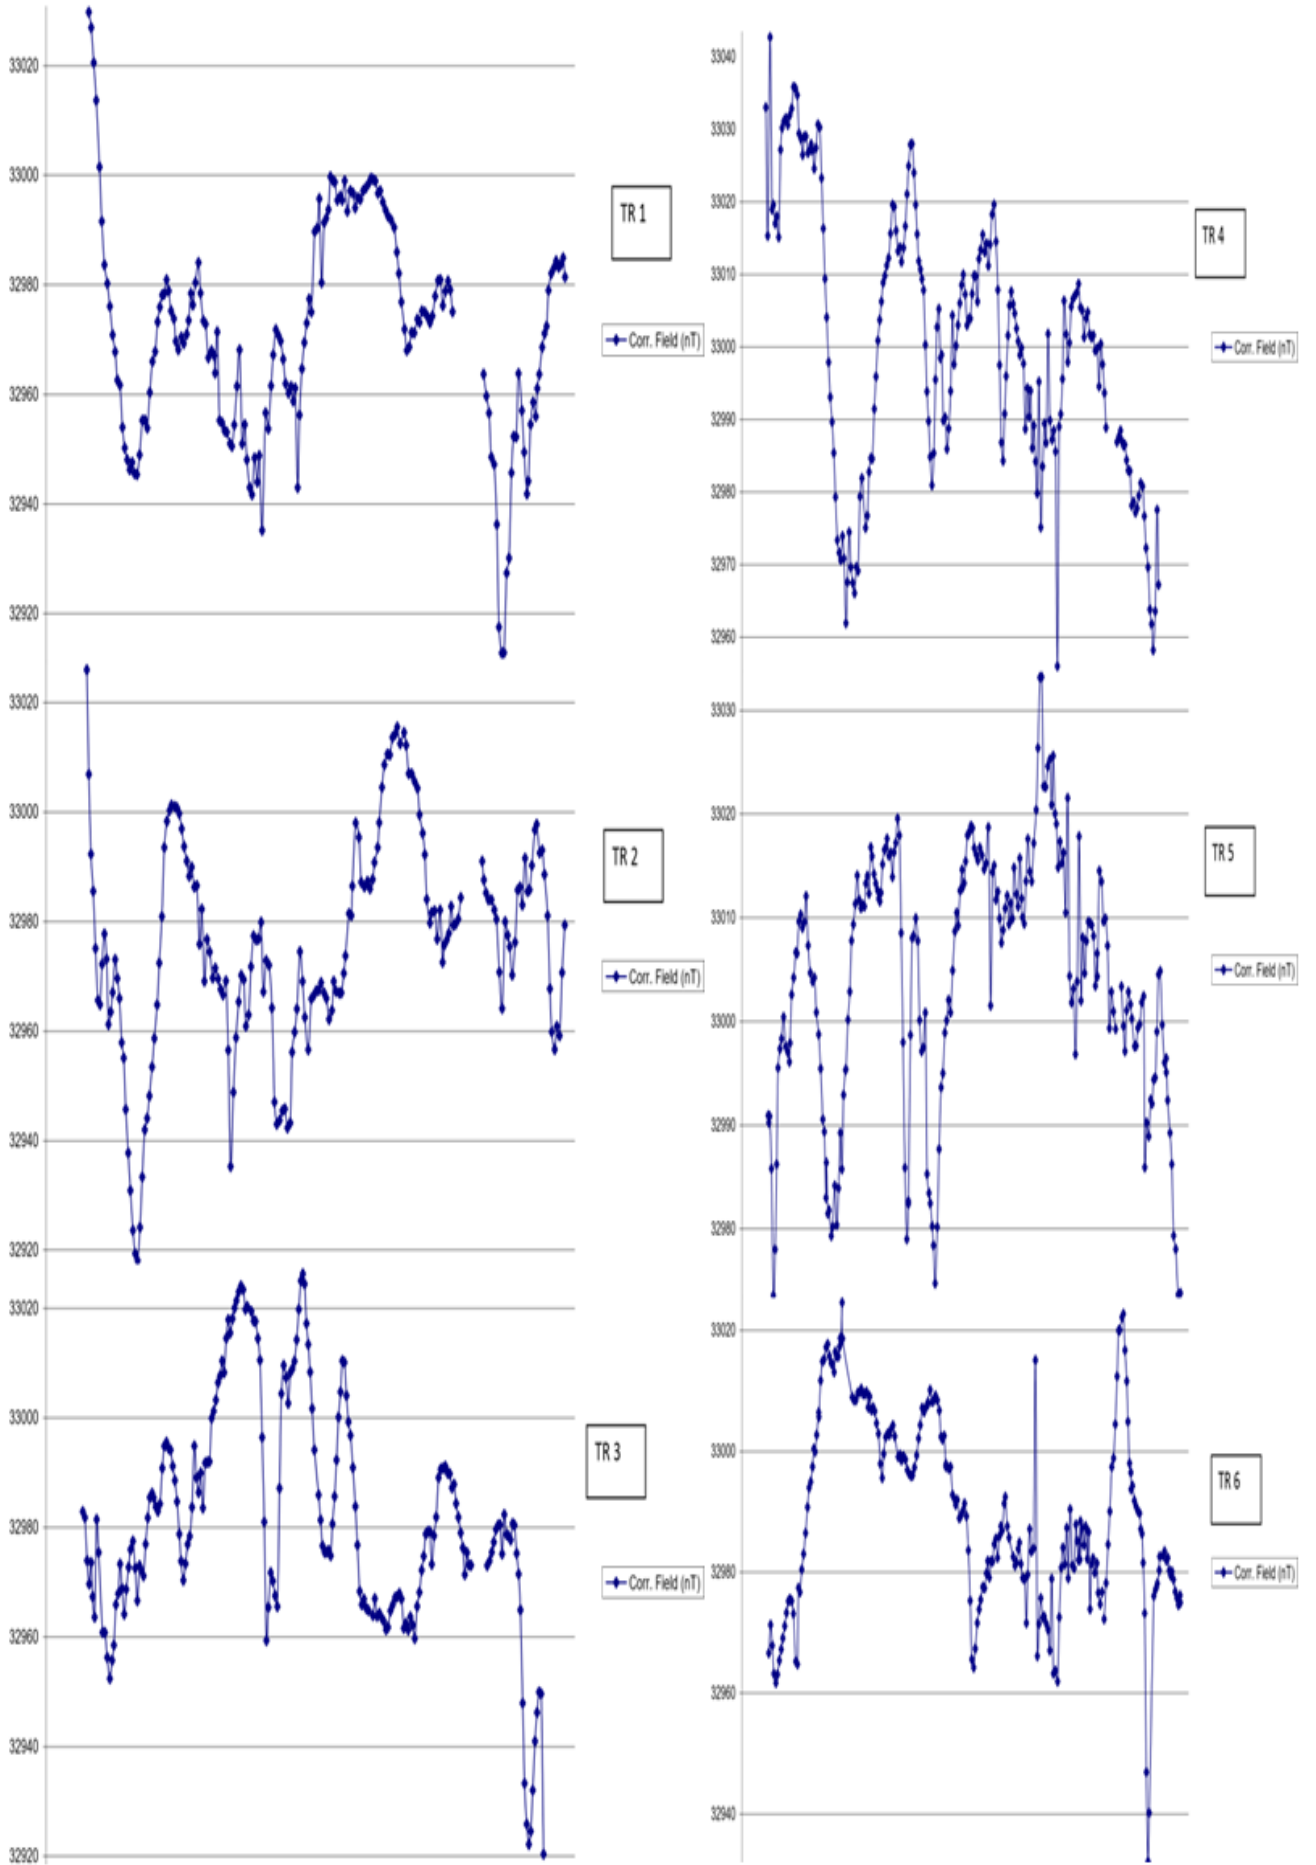


Figure 6.

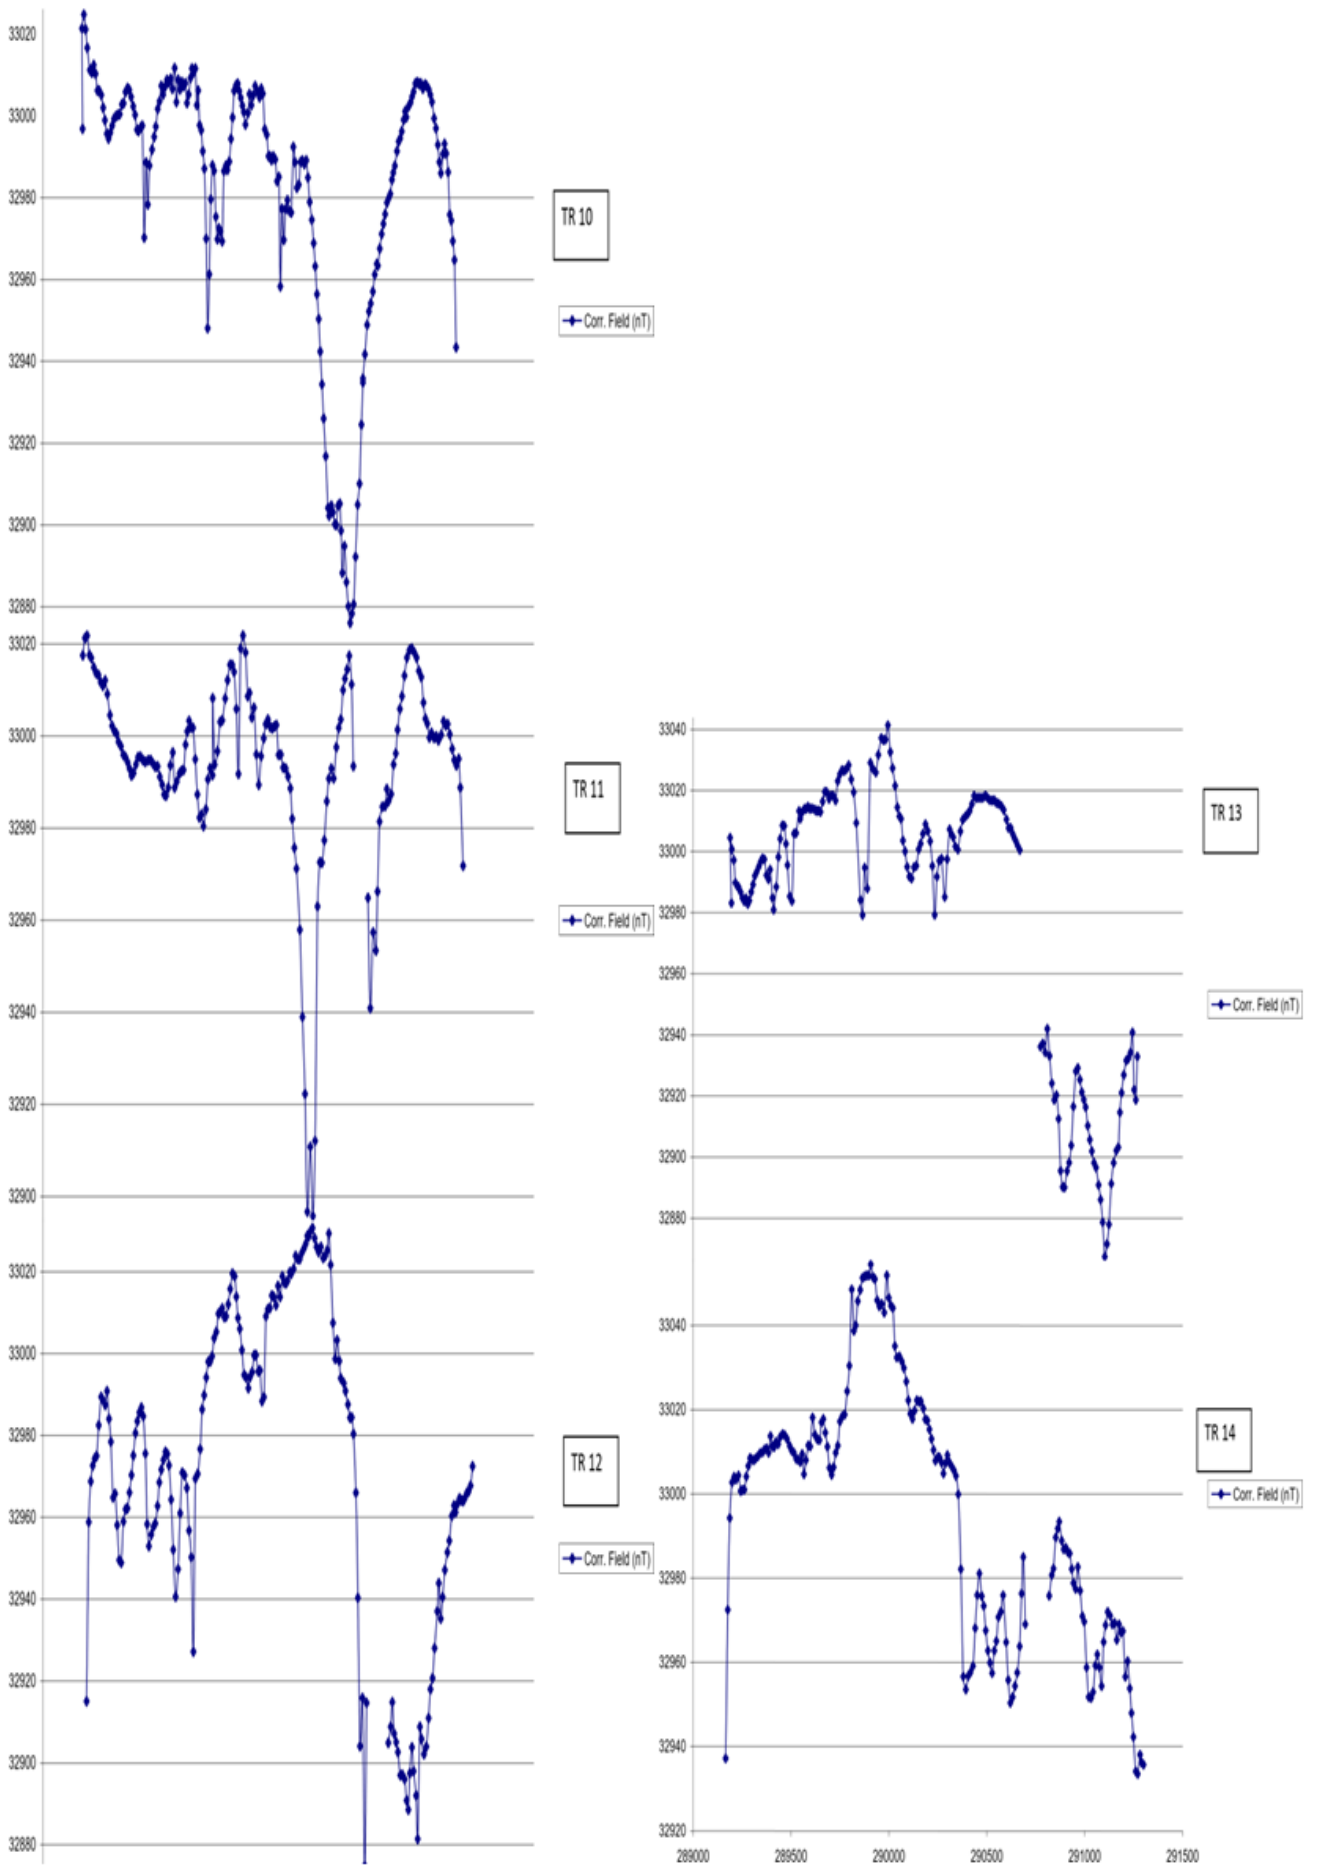
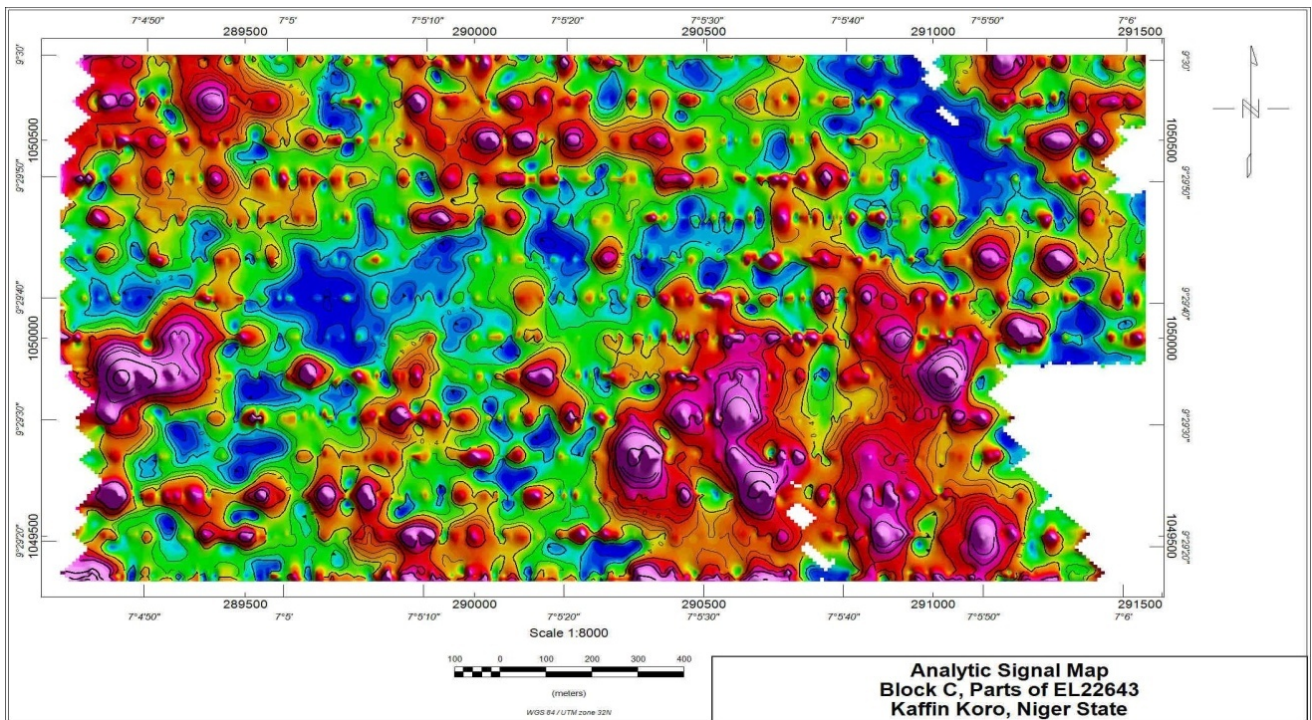
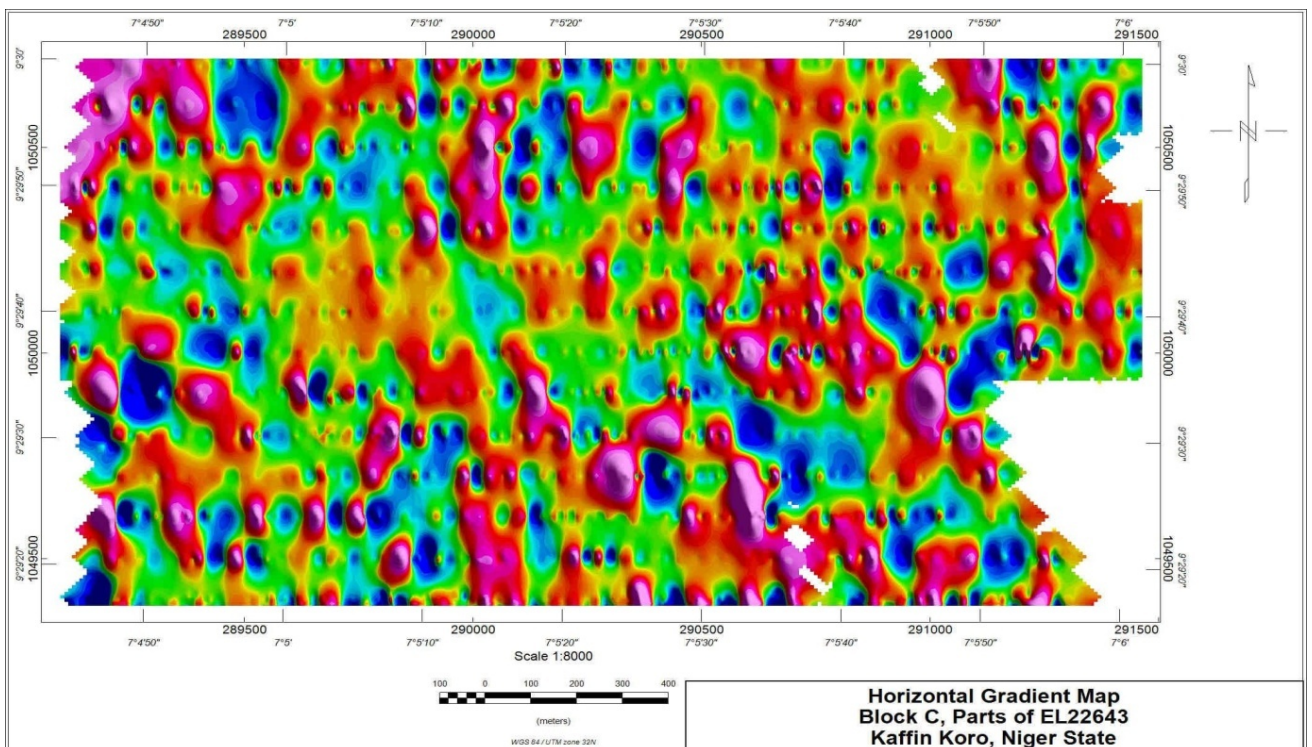


Figure 6. Stacked plot of the magnetic data of the study area



**Figure 7.** Analytical signal grid of the TMI grid of the study area



**Figure 8.** Horizontal Gradient Map of the TMI grid of the study area

## 4.2. Interpretation of Magnetic Survey Data

The magnetic profiles in the study area showed anomalies of varying amplitudes (Figure 6). The variation in amplitudes of the residual intensity may be due to the presence of geological structures such as faults, dykes and contacts in the area. The total magnetic intensity map of the area (Figures 3) exhibits zonation and alteration. This indicates hydrothermal alteration which is usually associated with mineralization probably as a result of intrusion.

The anomaly minima and maxima amplitude signature shows positive magnetic amplitude (maxima) ranging from -119nT to 77nT (Figure 6). This is quite appreciable for reasonable magnetic anomaly and it suggests that the magnetic susceptibility of the study area is contrasting, hence suitable for magnetic method of exploration. The residual magnetic field intensity map shows N/S, E-W, NE/SW and NW/SE trending anomalies (Figures 5). This shape of magnetic signature obtained in the ground magnetic survey generally suggests a step or



an edge structures like dyke or intrusion, such structures are of interest may hold mineralization at certain depth.

RES2DINV software was used for the 2D-inversion of the resistivity and IP data from the Geomatic GD-10 Supreme 2D Geo-electrical system. Observed apparent resistivity and IP data presented as pseudo-section and 2-D inverted resistivity-IP mode show a qualitative idea of resistivity and chargeability distribution in the subsurface (Figure 9 to Figure 15). Primary gold occurrences in the

northern Nigeria schist belts are associated with sulphide mineralization, hence high chargeability become a major factor for prospect and delineation. Quartz veins are characterized by high resistivity (low conductivity). Most primary gold mineralization in the schist belts commonly occurs in quartz veins within different lithologies, therefore geophysical characteristics of the quartz veins becomes another important factors in prospecting and delineation gold deposit.

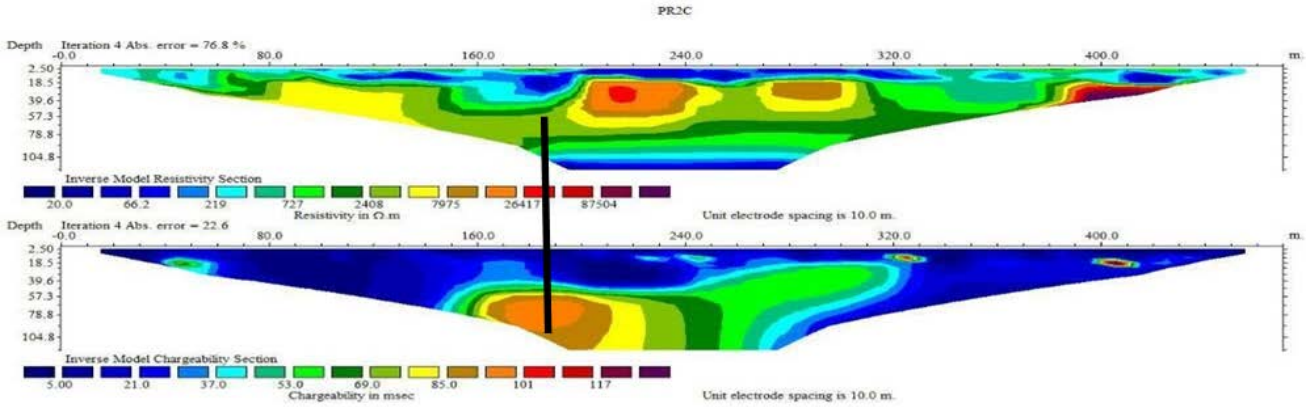


Figure 9. 2-D inverted IP-Resistivity mode plot for Profile 2C\_West (290045 to 289571, 1050600)

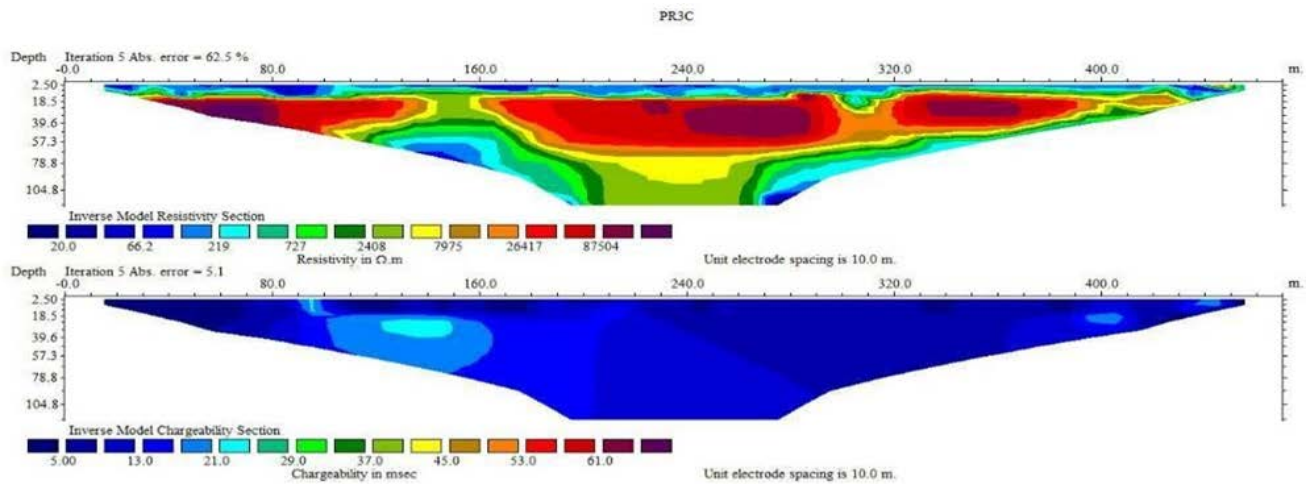


Figure 10. 2-D inverted IP-Resistivity mode plot for Profile 3C\_West (290070 to 289597, 1050500)

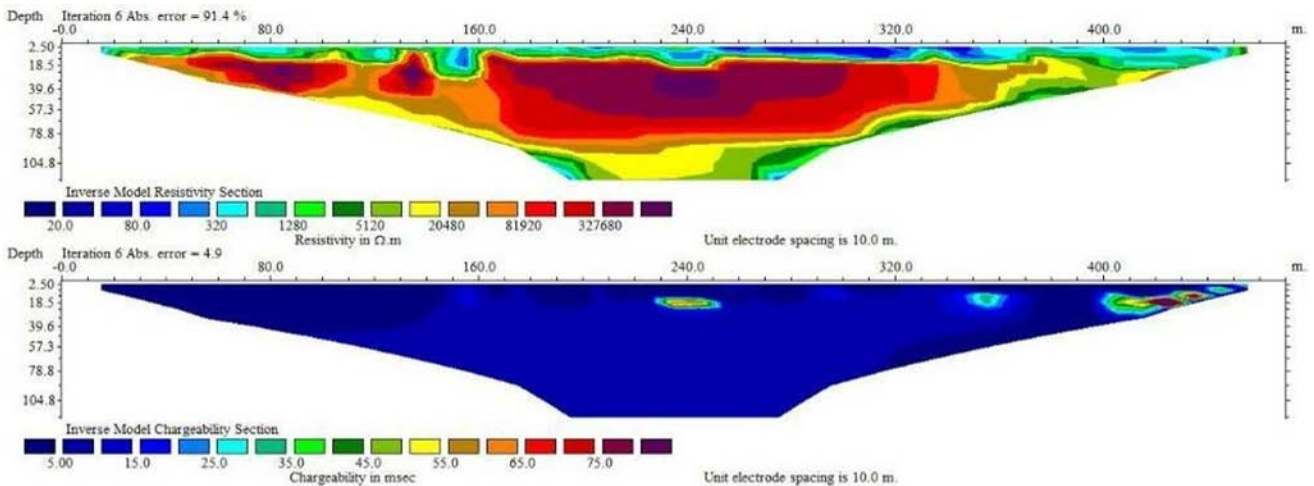


Figure 11. 2-D inverted IP-Resistivity mode plot for Profile 5C\_West (290240 to 289773, 1050300)

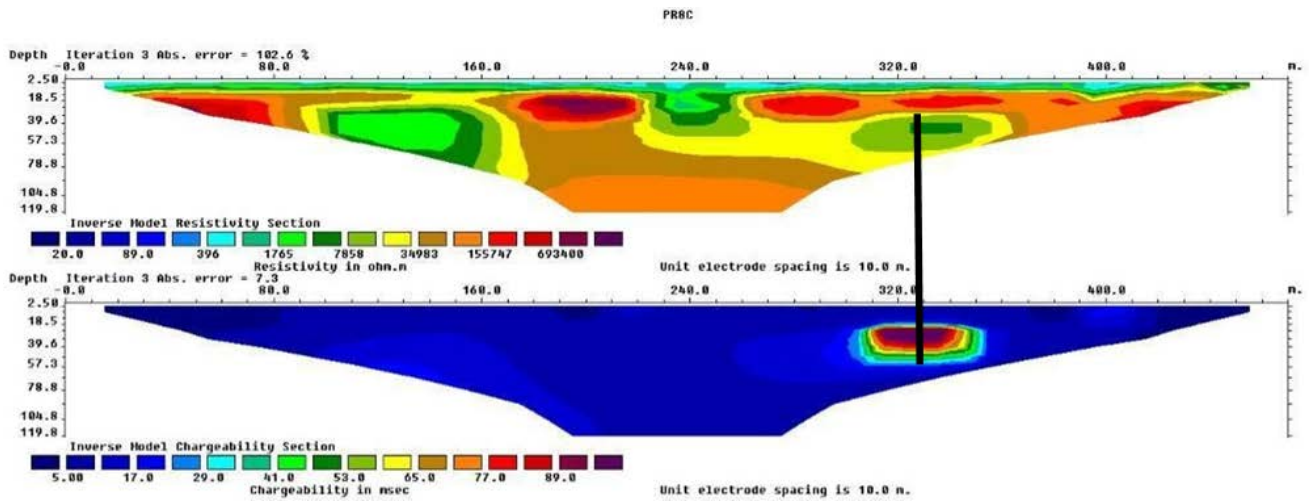


Figure 12. 2-D inverted IP-Resistivity mode plot for Profile 8C\_East (290600 to 291070, 1050000)

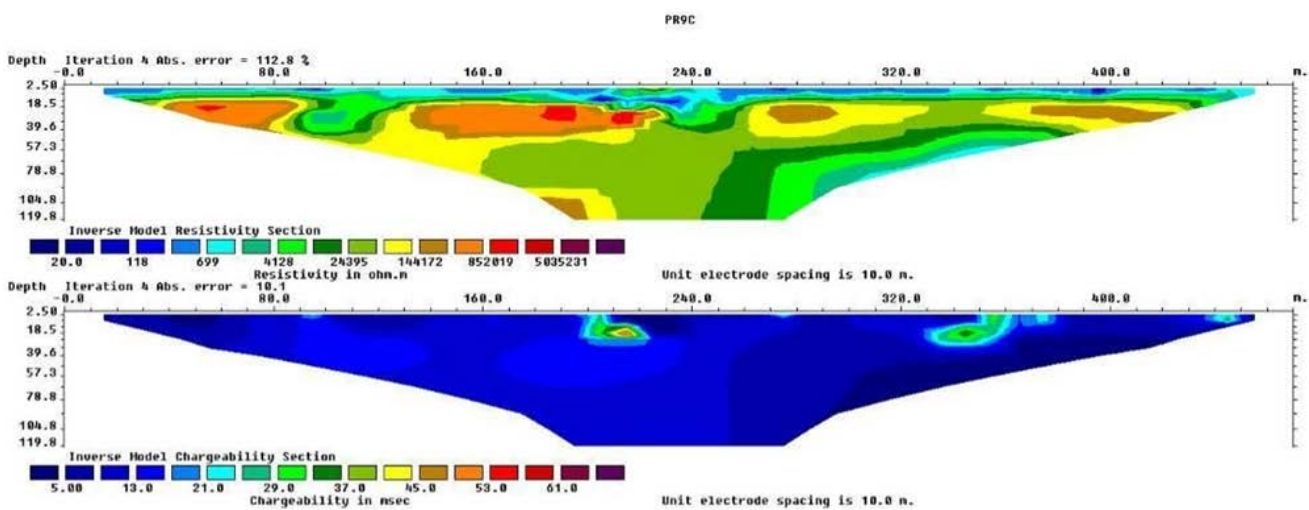


Figure 13. 2-D inverted IP-Resistivity mode plot for Profile 9C\_East (290600 to 291069, 1049900)

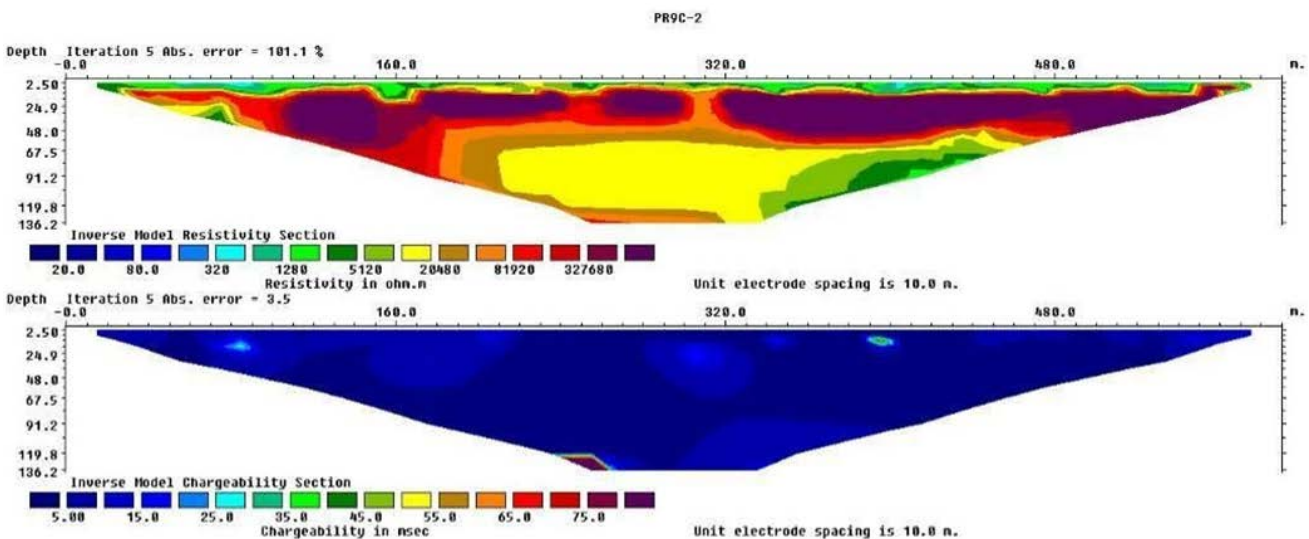


Figure 14. 2-D inverted IP-Resistivity mode plot for Profile 9C\_West (290500 to 289908, 1049900)

From the IP and resistivity models (Figure 9 to Figure 15), several bodies with high resistivity with corresponding high chargeability were identified at a relatively shallow depth (less than 42m) in the study area. IP survey revealed that most of the magnetic anomalies investigated are chargeable and that their chargeability

increases with depth. Also some massive chargeable bodies were delineated at depth (Figure 12). Two (2) major bodies with anomalous signatures (High chargeability and high resistivity) were identified from seven IP profiles in the study area. The identified chargeable bodies' width ranges from 40m to maximally 80m. Its approximate



length and orientation could not be determined from the IP data since the bodies were delineated on a single profile

but from the associated structural element from the magnetic data their orientation is NW/SE (Figure 16).

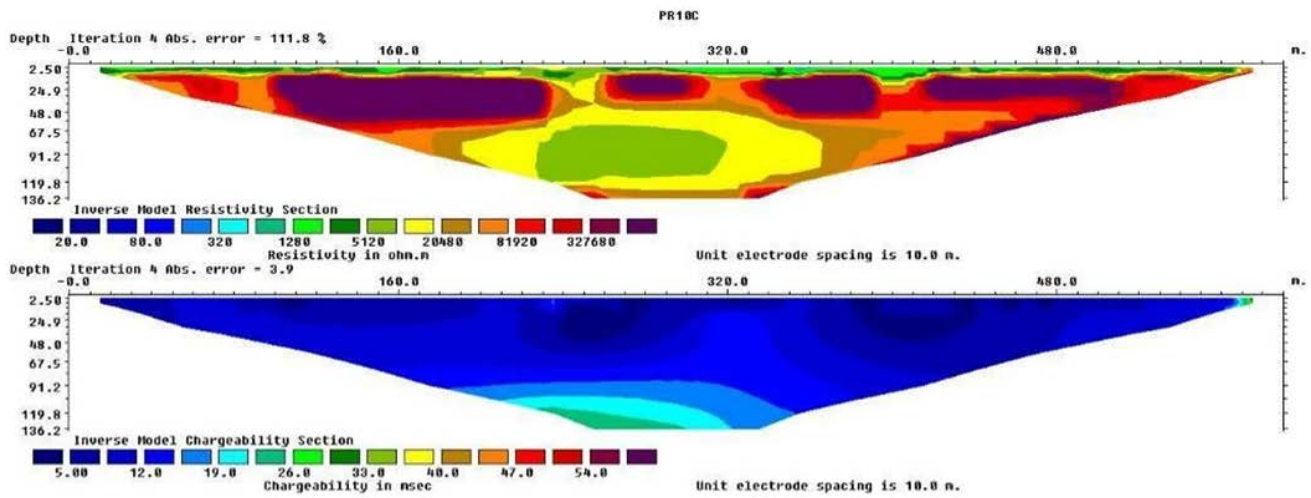


Figure 15. 2-D inverted IP-Resistivity mode plot for Profile 10C\_West (290500 to 289907, 1049800)

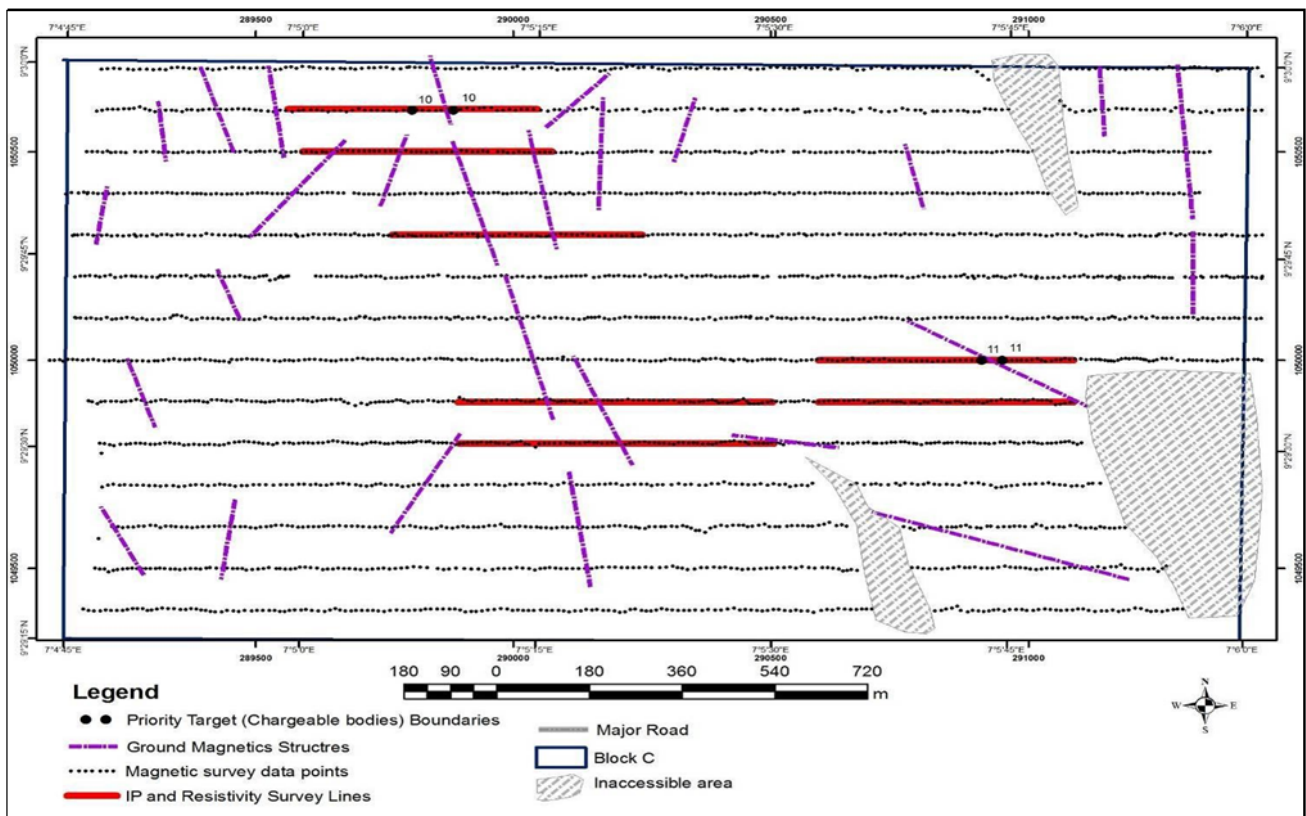


Figure 16. Mineral target map for the study area

Table 1. Characteristics of the identified chargeable bodies/veins

ID	Profile	Start Easting	End Easting	Start Northing	Depth (m)	Chargeability	Resistivity	Priority	Target Number
1	TR2C_W	289805	289885	1050600	40m	Good	Very High	Very High	10
2	TR8C_W	290910	290950	1050000	25m	Good	Very High	Very High	11

### 5. Conclusion

From the interpretation of geophysical data the following conclude can be reached:

- (1) Wide range of linear structures suspected to be quartz veins which are believed to host gold and disseminated sulfides were identified in the area.

- (2) Magnetic interpretation indicated that the depths of such ore deposits range from 35 to 42 m with the structures trending in NE-SW and N-S directions.
- (3) Two major bodies with anomalous signatures (High chargeability and high resistivity) were identified from seven IP profiles in the study area.

- (4) The identified chargeable bodies/structures length ranges from less than 50m to maximally 400m while the width ranges from 40m to maximally 80m based on the IP signatures.

## References

- [1] Chuku, D. U. (1981). Distribution of gold mineralization in the Nigeria Basement Complex in relation to orogenic cycle and structural setting. In the Precambrian Geology of Nigeria. A Publication of the Geological Survey of Nigeria. pg. 177-194.
- [2] Smith R. J. (2002). Geophysics of Iron Oxide Copper-Gold Deposits (Hydrothermal Iron Oxide Copper-Gold and Related Deposits: A Global Perspective vol. 2) ed T M Porter (Adelaide: PGC Publishing), pg. 357-67.
- [3] Macnae J. C. (1979). Kimberlites and exploration geophysics Geophysics 44, pg. 1395-416.
- [4] Vacquier V., Holmes C.R, Kintzinger P.R. and Lavergne M. (1957). Prospecting for Ground water by induced electrical polarization Geophysics 23, pg. 660-87.
- [5] Sternberg B. K. and Oehler D. Z. (1990) Induced polarization in hydrocarbon surveys: Arkoma basin case histories Induced Polarisation: Applications and Case Histories. vol. 4 ed S H Ward (USA: Society of Exploration Geophysicists).
- [6] Towel J. N, Anderson R. G, Pelton W. H, Olhoeft G. R. and LaBrecque D. (1985). Direct detection of hydrocarbon contaminants using induced polarization method SEG Meeting pg. 145-7.
- [7] Sumner J. S. (1976). Principles of Induced Polarization for Geophysical Exploration (Amsterdam: Elsevier), pp. 277.
- [8] Marshall D. J. and Madden T. R. (1959). Induced polarization, a study of its causes Geophysics 24, pg. 790-816.
- [9] Klein J.D and Sill W.R. (1982). Electrical properties of artificial clay-bearing sandstone. Geophysics 47, pg. 1593.
- [10] Kiberu J. (2002). Induced polarization and resistivity measurements on a suite of near surface soil samples and their empirical relationship to selected measured engineering parameters MSC. Thesis International Institute for Geo-information Science and Earth Observation (ITC), Enschede, The Netherlands, pg. 119.
- [11] Garba, I. (2002). Late Pan-African tectonics and origin of gold mineralization and rare-metal pegmatite in Kushaka schist belt, northwestern Nigeria. Journal of mining and geology vol. 38, pg. 1-12.
- [12] Ajibade, A.C., (1980). Geotectonic Evolution of the Zungeru Region, Nigeria. (Unpublished Ph.D. Thesis), University of Wales, Aberystwyth).
- [13] Loke, M.H., (2011). Electrical resistivity surveys and data interpretation. in Gupta, H (ed.), Solid Earth Geophysics Encyclopaedia (2nd Edition) "Electrical & Electromagnetic" Springer-Verlag, pg. 276-283.
- [14] Dobrin, M. B and Savit, C. (1988). Introduction to geophysical prospecting, 4 ed, McGraw-Hill Book Co., pg. 867.
- [15] Clark, D. A. (1997). Magnetic petrology aid to geological interpretation of magnetic data. Journal of Australian Geology & Geophysics 17 (2), pg. 83-103.
- [16] Luyendyk, A. P. J. (1997). Processing of airborne magnetic data. Journal of Australian Geology & Geophysics 17(2), pg. 31-38.
- [17] Ramadan T.M. and Sultan A. S. (2004) Integration of remote sensing, geological and geophysical data for the identification of massive sulphide zones at Wadi Allaqi area Middle East J., Ain Shams Univ., Earth Sci. Ser. 18, pg. 165-74.